



**Wind**  
***SALICE***





Wind is characterised by compactness and elegant design.

Combining the highest levels of performance with smooth and perfectly controlled movement, Wind is small, unobtrusive and elegantly designed. This compact lift system has strong functional appeal and takes up a minimum of valuable storage space.

Wind is versatile and suitable for a vast range of furniture applications: office furniture, kitchens, bathrooms, living- and bedroom furniture.

With an optional carrier, Wind can be used in corner cabinets and for doors of large weight and dimensions.

This system incorporates a soft close mechanism for decelerated closing or the Push self-opening system for handle-less doors. Wind is available in numerous attractive finishes






Technical information


Flap door lift system fixed to the cabinet sides.

Drilling of the door  $\varnothing 35$ .  
13 mm deep cup.  
85° opening with stop device (premounted).  
94° opening without stop device.  
Possible drilling distance on the door (K): from 3 to 7 mm.

Drilling patterns.

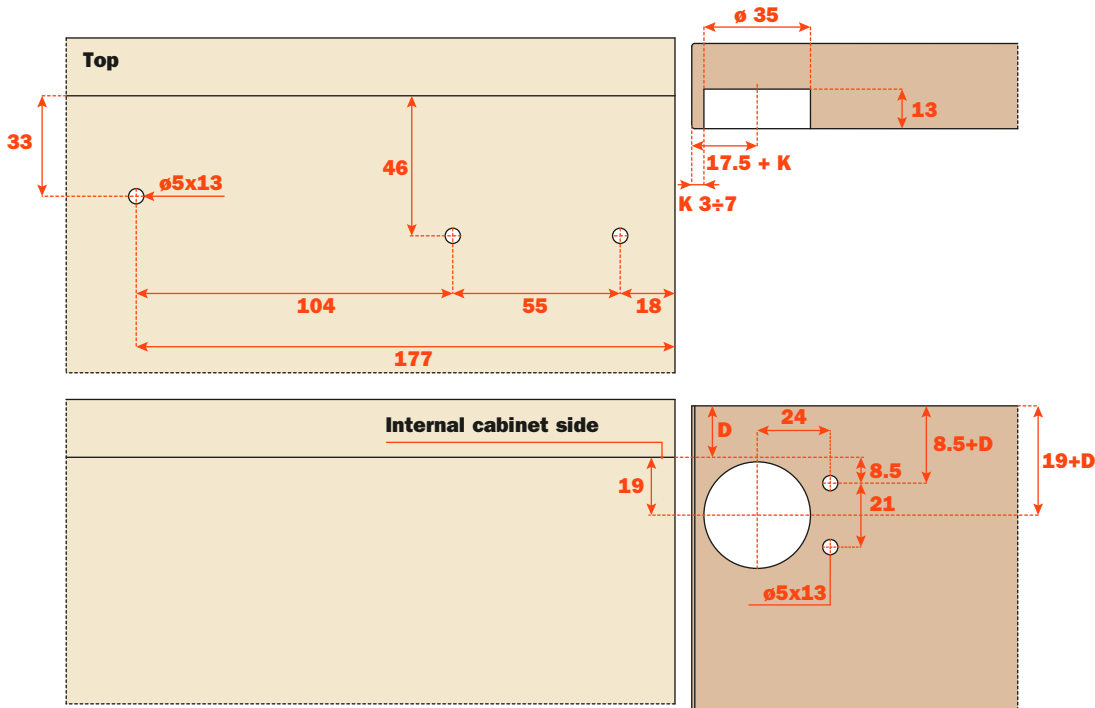


Space needed to open the door.

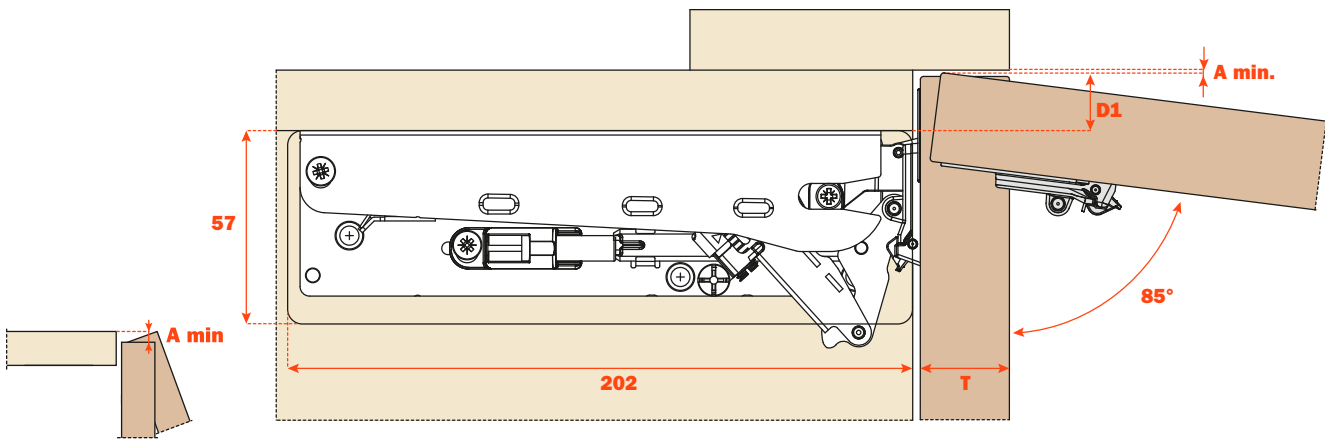


K		D1
3	=	16
4	=	17
5	=	18
6	=	19
7	=	20

	T=	16	17	18	19	20	21	22	23	24	25	26	27	28
K=3	A = min	0	0.1	0.1	0.2	0.2	0.3	0.5	0.6	0.7	0.9	1.1	1.8	2.7
K=4	A = min	0	0.1	0.1	0.2	0.2	0.3	0.4	0.6	0.7	0.9	1.1	1.3	2.1
K=5	A = min	0	0.1	0.1	0.2	0.2	0.3	0.4	0.6	0.7	0.9	1.1	1.3	1.5
K=6	A = min	0	0.1	0.1	0.2	0.2	0.3	0.4	0.6	0.7	0.9	1.0	1.2	1.5
K=7	A = min	0	0.1	0.1	0.2	0.2	0.3	0.4	0.6	0.7	0.8	1.0	1.2	1.4

## Fixing the plates to the cabinet sides.

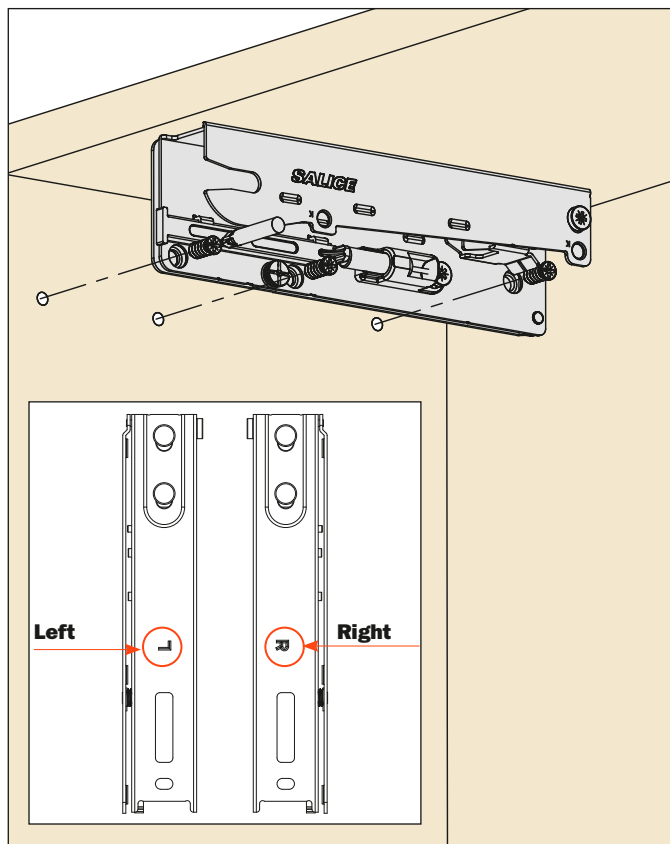


## Fixing the cups to the door.

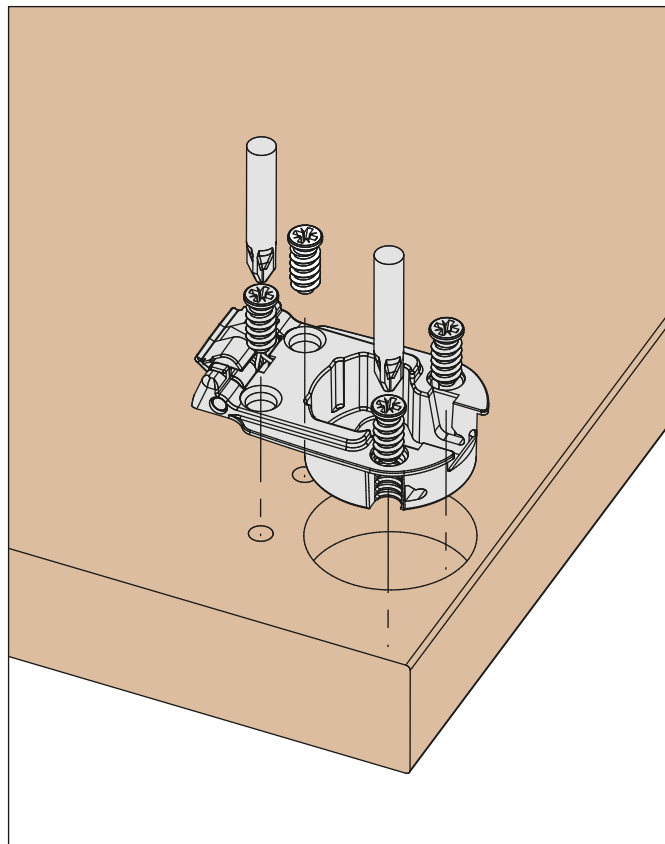


## Deploying the system to the cups.

Connecting the system to the cups.  
This operation is tool free.

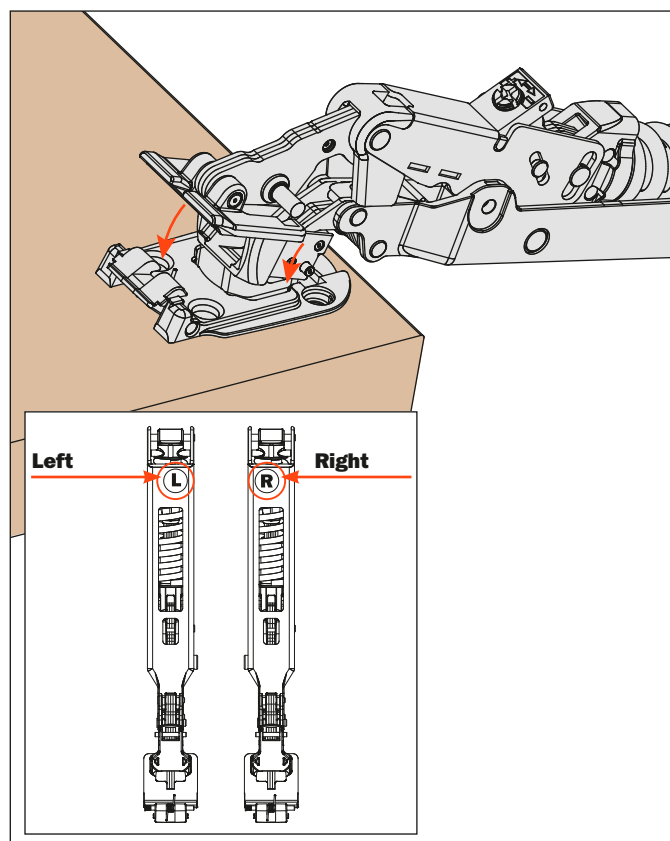

## Installing the system to the plates.

Inserting the system until the back fixing is engaged.  
This operation is tool free.

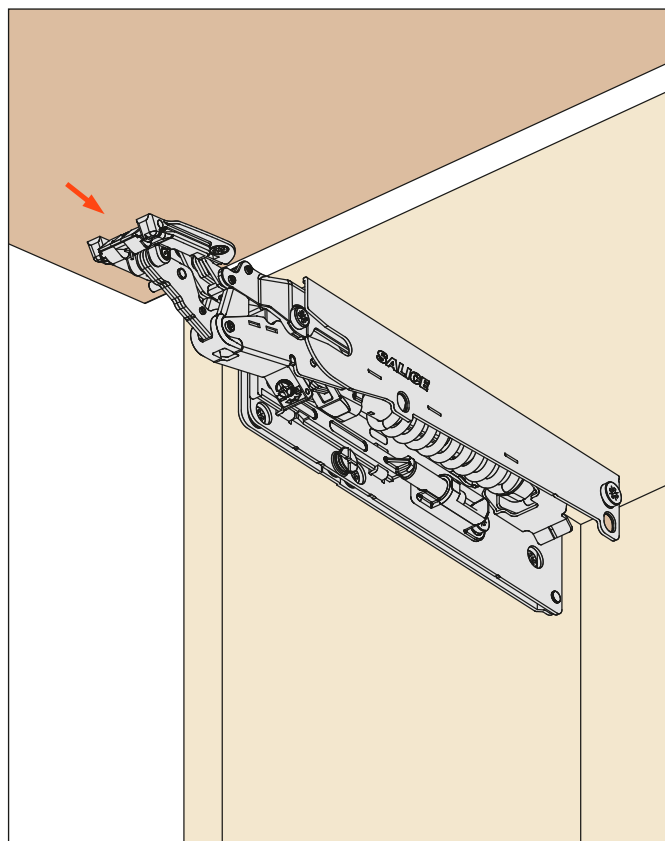


## Installing the covers.






### WARNING ! Security cable ties.

Remove the cable ties only at the end of the assembly.  
Use the instructions and the QR Code attached to the systems.

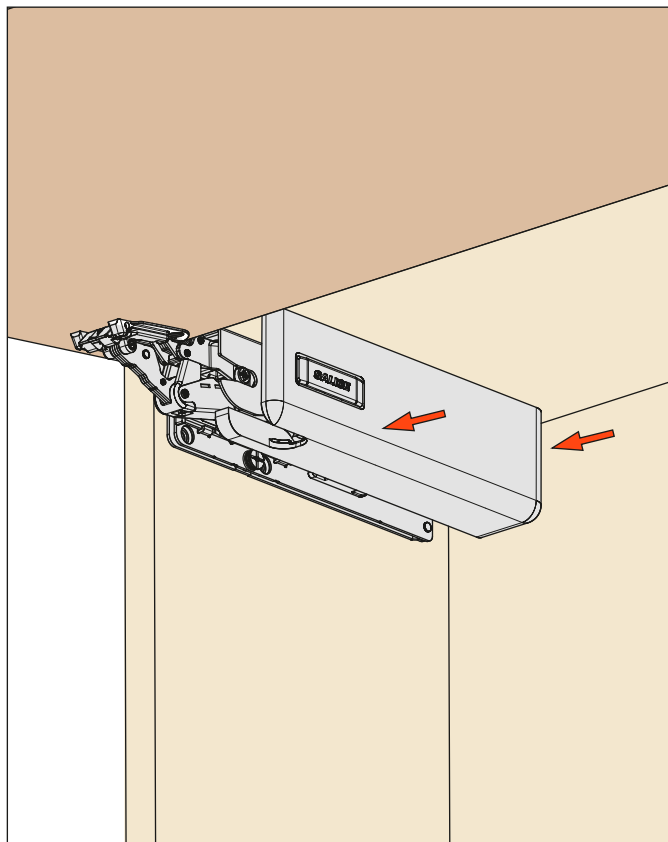


## Adjustments.

- 1 - adjustment of the spring strength.
- 2 - adjustment of the decelerating effect.
- 3 - extension/adjustment of the opening angle of the door.
- 4 - height adjustment of the door from - 2 to +2.
- 5 - sideways adjustment of the door from - 2 to +2.
- 6 - depth adjustment of the door from - 1 to +3.

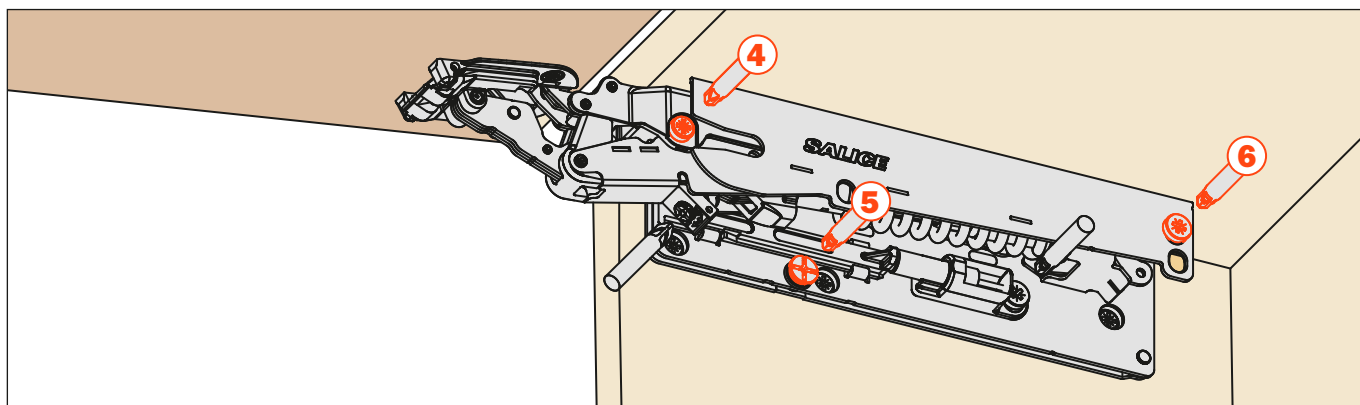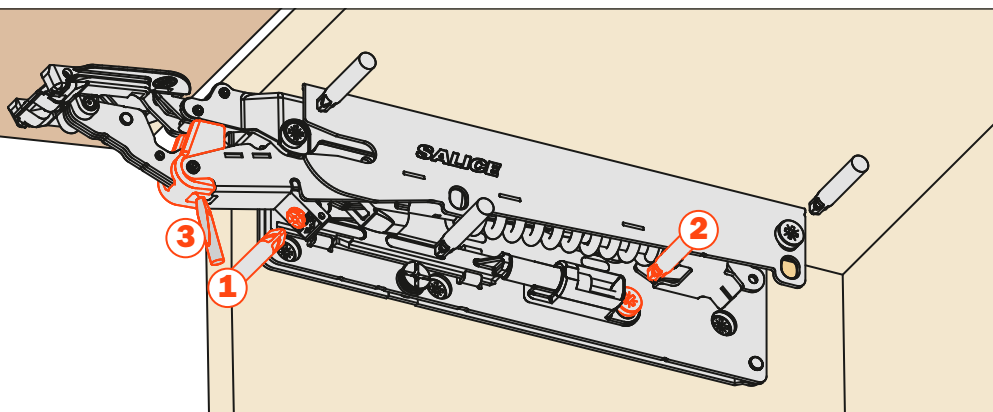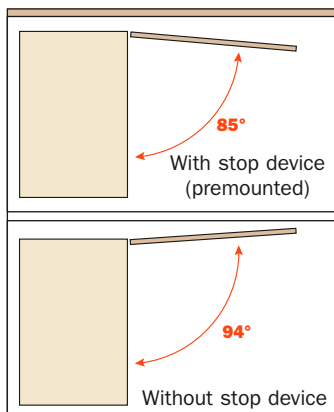


### Removal of the covers.

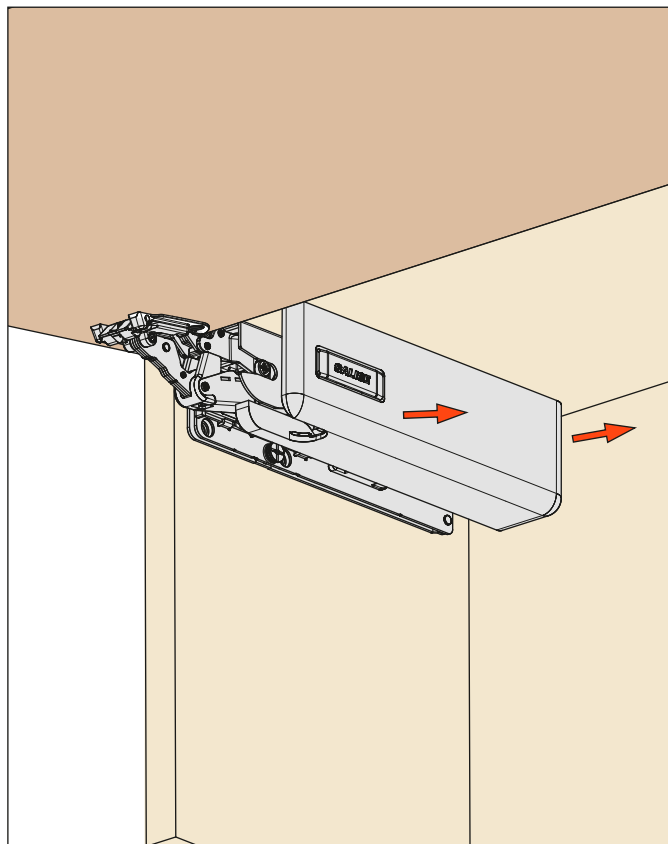


### Disassembly of the system.


Press the back lever and pull out the system.  
This operation is tool free.

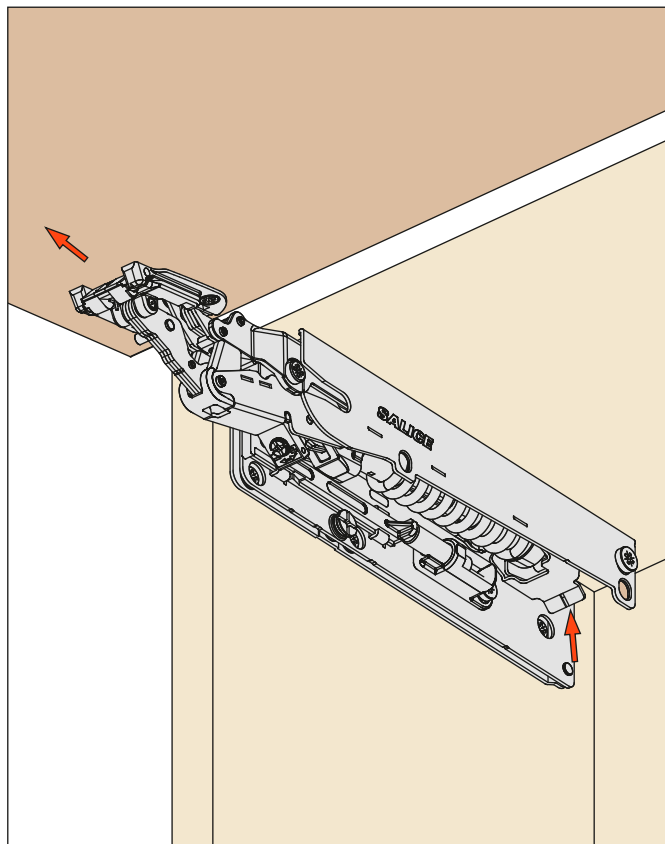

### Unfasten the system from the cups.

Disconnecting the system from the cups.  
This operation is tool free.

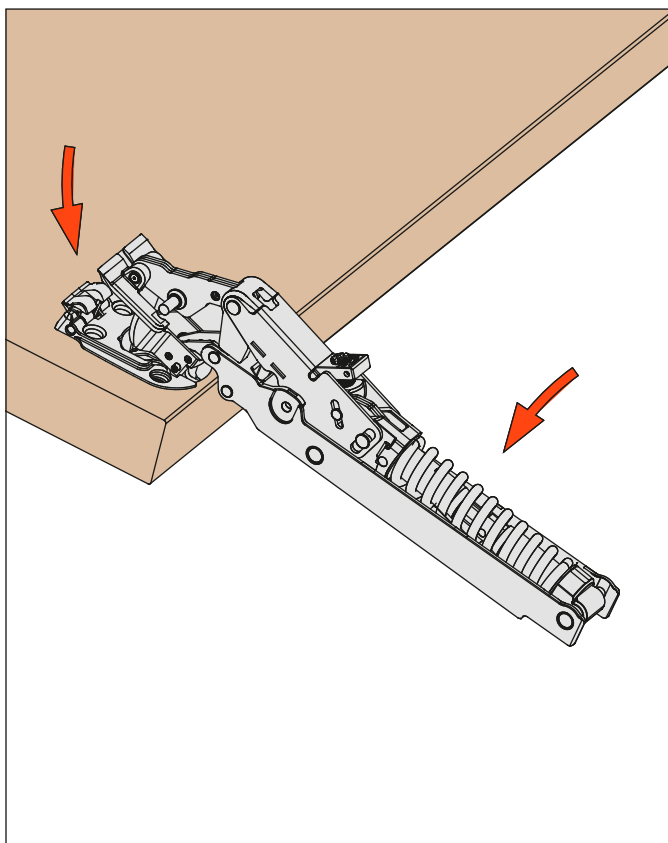

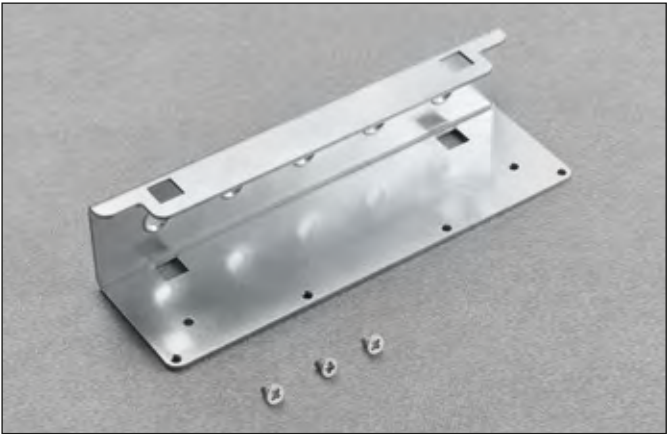


Technical information

Carrier to be screw-fixed to the top of the cabinet for use with:


- corner cabinets
- doors of large weight and dimensions, so that the door does not fle

The carrier is fixed with wood screws 4x18.

Drilling patterns.

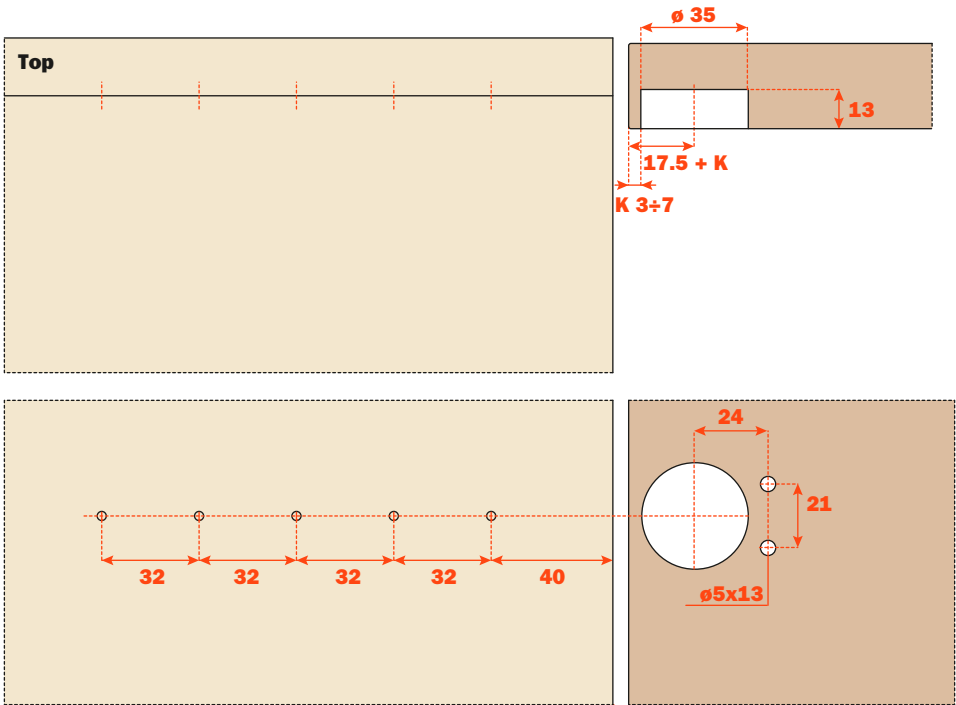

Space needed to open the door.

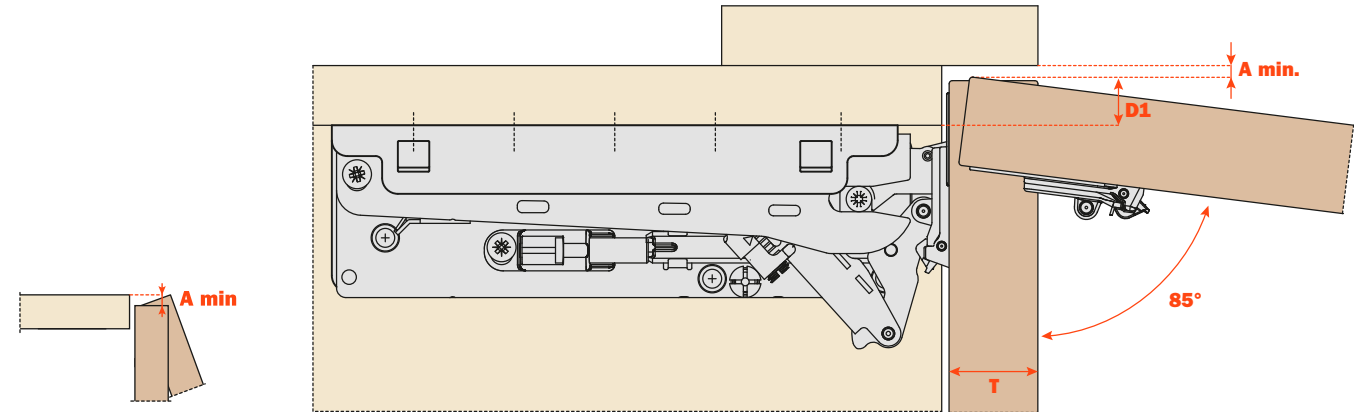


K		D1
3	=	13
4	=	14
5	=	15
6	=	16
7	=	17


	T=	16	17	18	19	20	21	22	23	24	25	26	27	28
K=3	A = min	0	0.1	0.1	0.2	0.2	0.3	0.5	0.6	0.7	0.9	1.1	1.8	2.7
K=4	A = min	0	0.1	0.1	0.2	0.2	0.3	0.4	0.6	0.7	0.9	1.1	1.3	2.1
K=5	A = min	0	0.1	0.1	0.2	0.2	0.3	0.4	0.6	0.7	0.9	1.1	1.3	1.5
K=6	A = min	0	0.1	0.1	0.2	0.2	0.3	0.4	0.6	0.7	0.9	1.0	1.2	1.5
K=7	A = min	0	0.1	0.1	0.2	0.2	0.3	0.4	0.6	0.7	0.8	1.0	1.2	1.4



**Fixing the carriers to the top of the cabinet.**

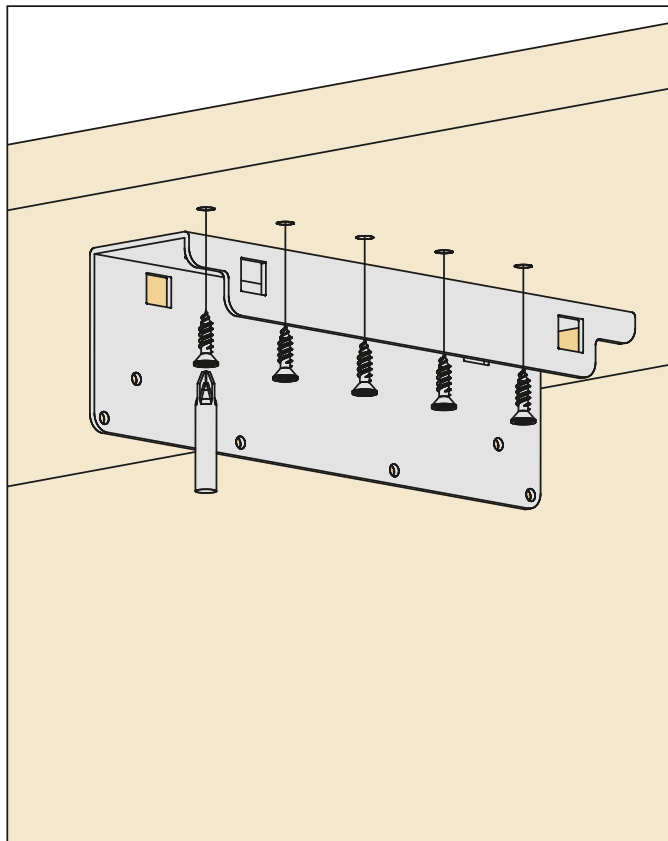


**Fixing the plates to the carriers.**

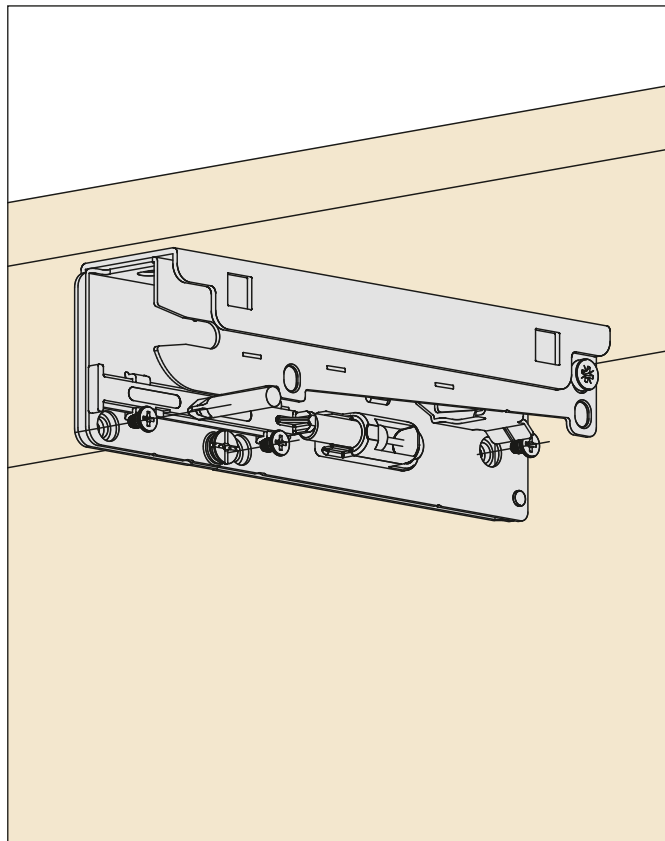


**Installing the system to the plates.**


Installing the system till the back fixing.  
This operation is tool free.

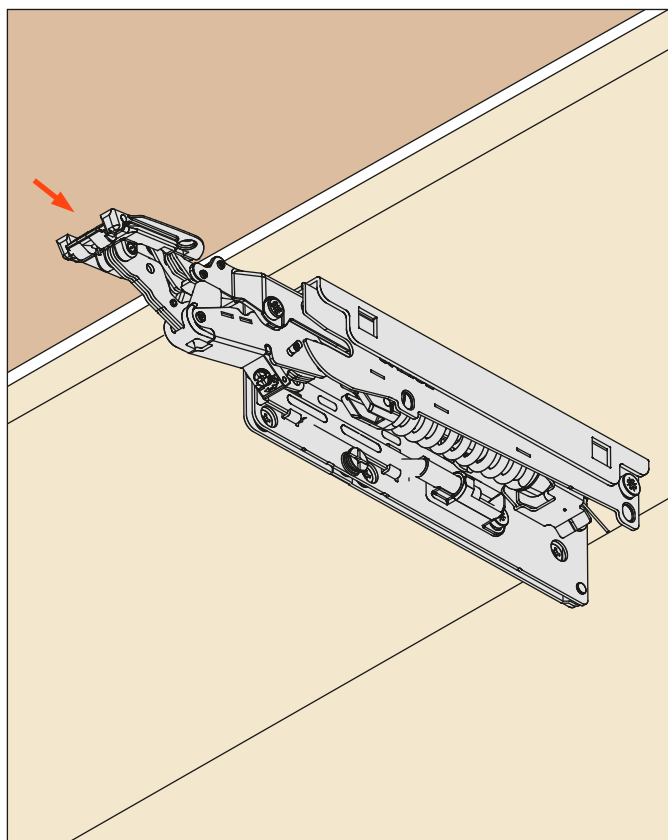

**Installing the covers.**

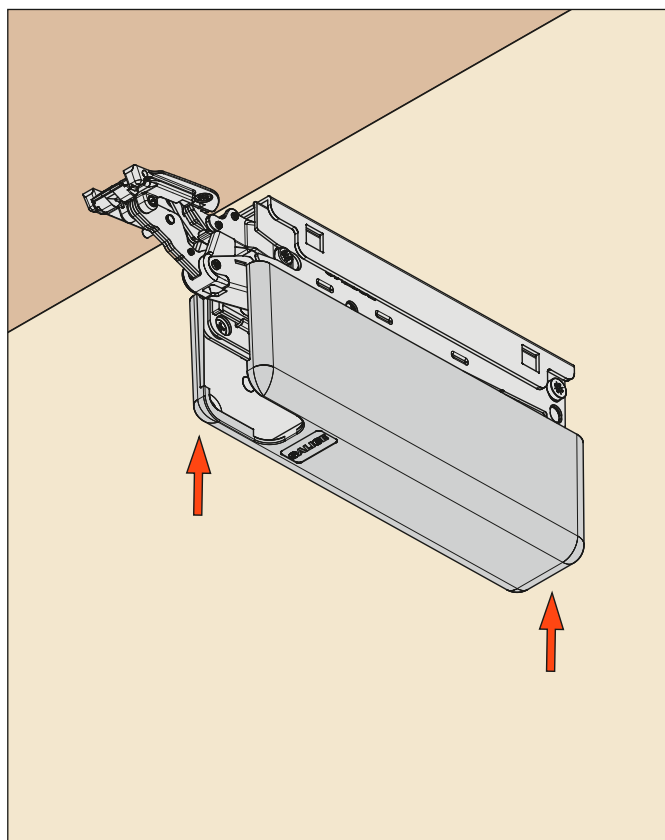


### Removal of the covers.

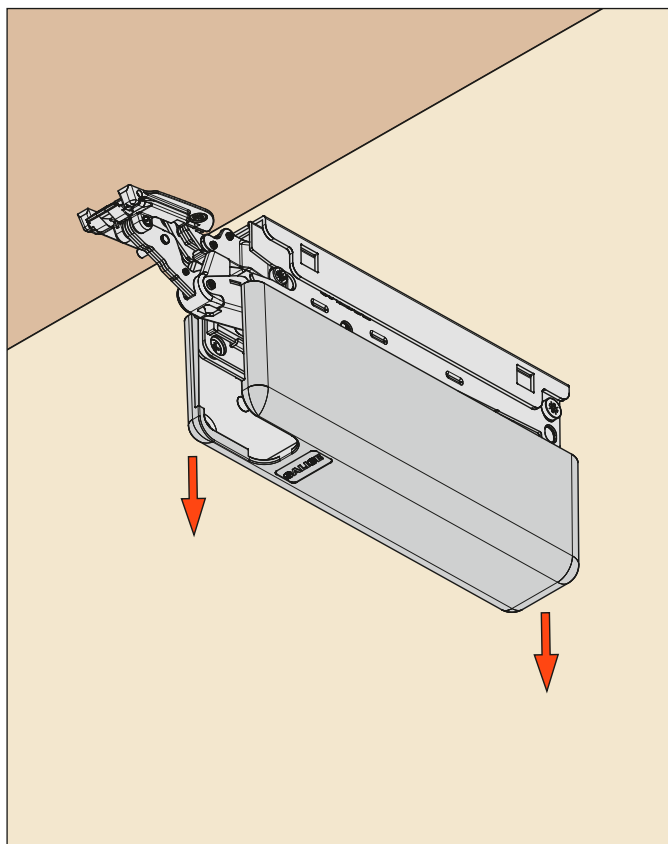



Unfasten the plates from the carriers.

### Disassembly of the system.


Press the back lever and pull out the system.  
This operation is tool free.

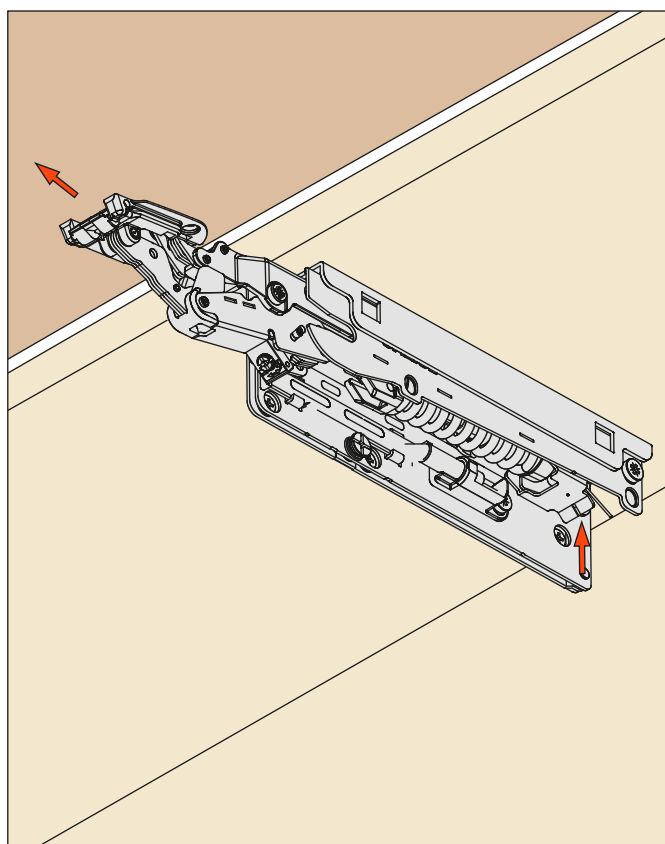

Unfasten the carriers.

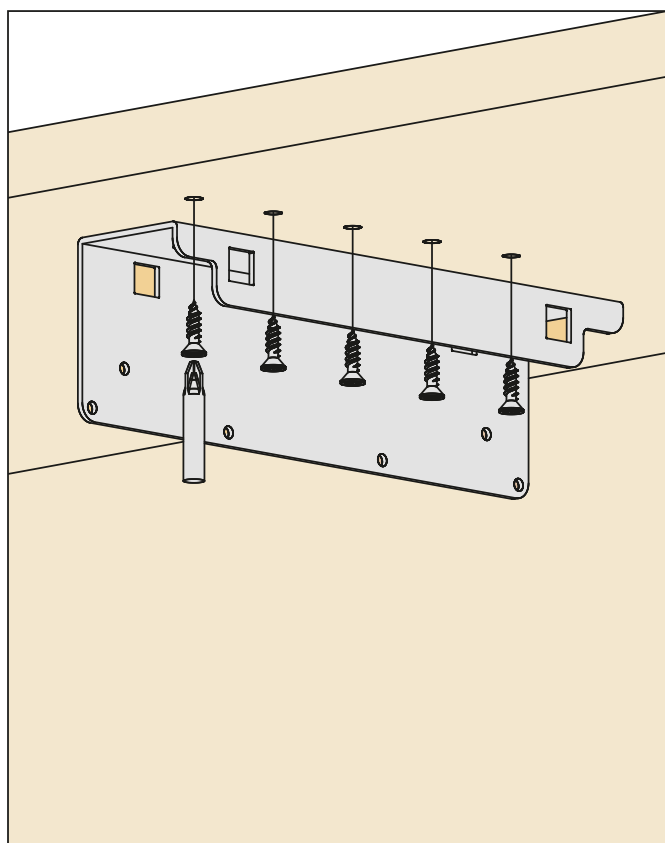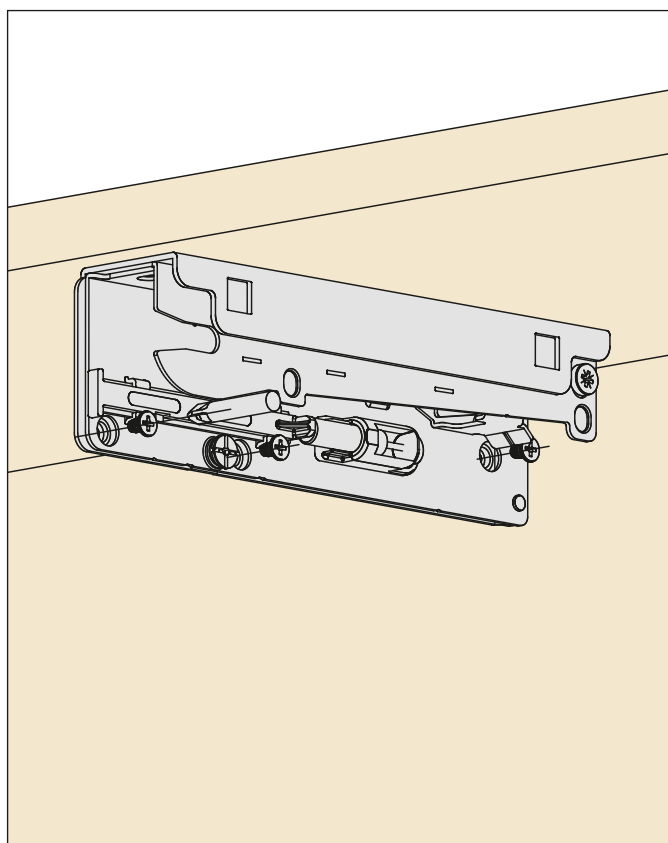


**For cabinets that require a third system.**

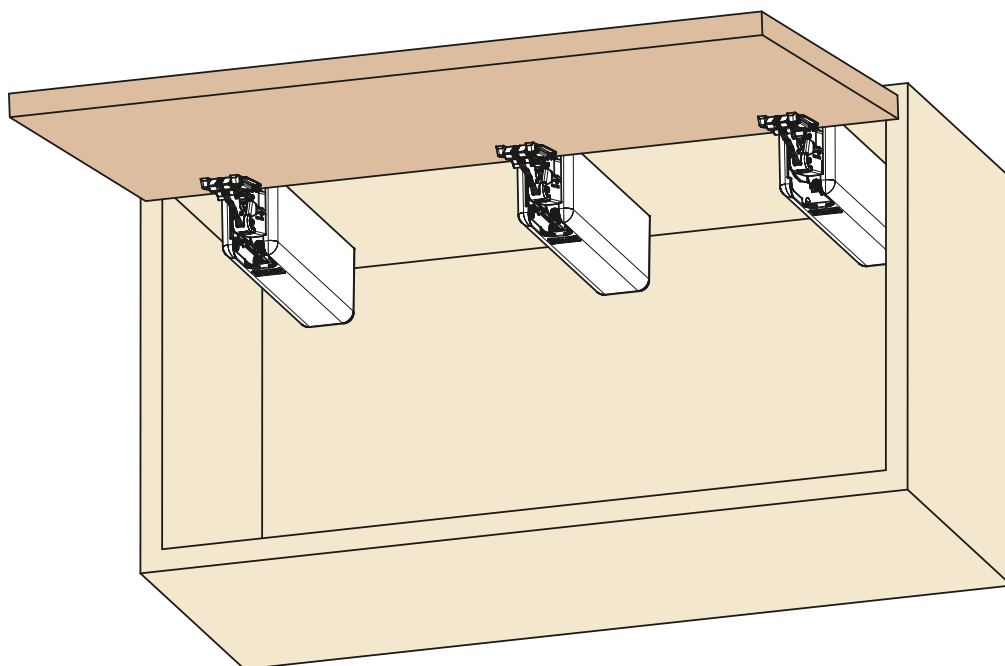

---

**For corner cabinets.**

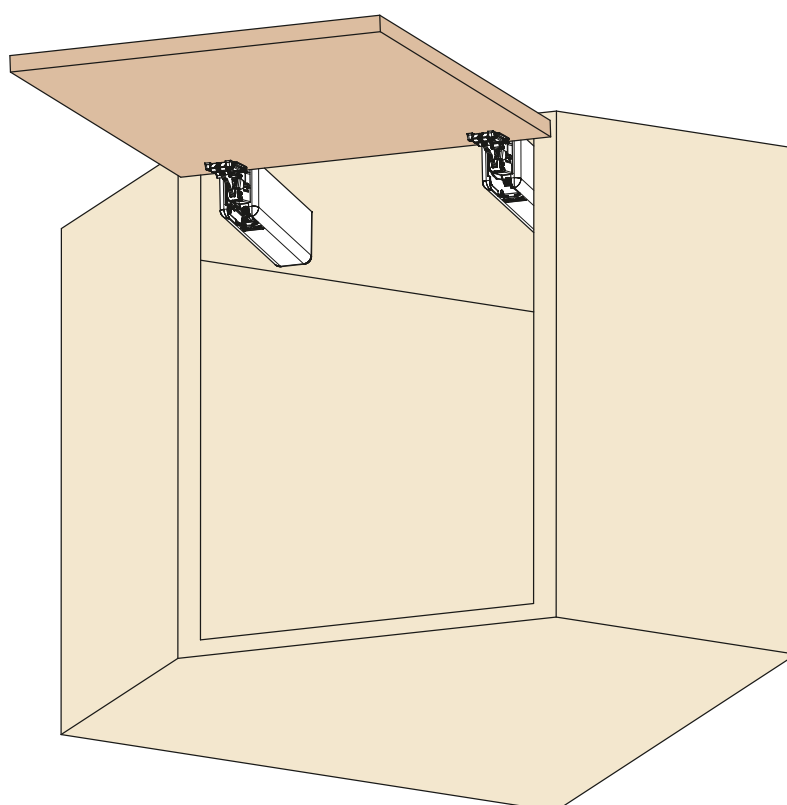

### **SRXA78A1SNXX\_**

White

Cover cap: nickel-plated finis



### **SRXA78AQSNNX\_**

Glossy white

Cover cap: nickel-plated finis



### **SRXA78AMSNNX\_**

Grey

Cover cap: nickel-plated finis



### **SRXA78AISNNX\_**

Stainless steel

Cover cap: nickel-plated finis



### **SRXA78A0SNXX\_**

Satin metal black

Cover cap: titanium finis



### **SRXA78ANSNNX\_**

Glossy metal black

Cover cap: titanium finis



### **SRXA78ACSNXX\_**

Champagne

Cover cap: nickel-plated finis



**SRUA78A1SNXXI**

White



**SRUA78AQSXXI**

Glossy white



**SRUA78AMSXXI**

Grey



**SRUA78AISXXI**

Stainless steel



**SRUA78A0SNXXI**

Satin metal black



**SRUA78ANSXXI**

Glossy metal black





**SRUA78ACSNXXI**

Champagne








INDUSTRIAL PACKING	PART NUMBER	CARTON	PALLET
	<b>SOFT CLOSE</b> <b>FRAKINX_SN9</b> SPRING STRENGTH	1 carton contains: 18 cups · 9 systems for right side 9 systems for left side · 9 plates for right side 9 plates for left side · Fixing screws included	24 cartons
	<b>PUSH OPENING</b> <b>FRAKINP_SN9</b> SPRING STRENGTH		

DOOR-SET PACKING	PART NUMBER	CARTON	PALLET
	<b>SOFT CLOSE</b> <b>FRAKFEX_SN9</b> SPRING STRENGTH	1 carton contains: 2 cups · 1 system for right side 1 system for left side · 1 plate for right side 1 plate for left side · Fixing screws and template for cabinet side drilling included	180 cartons
	<b>PUSH OPENING</b> <b>FRAKFEP_SN9</b> SPRING STRENGTH		

COVER	PART NUMBER	CARTON	PALLET
	<b>INDUSTRIAL PACKING</b> <b>SRXA78A_SNXXI</b> COLOUR OF THE COVER	1 carton contains: 9 covers for right system · 9 covers for left system · cover caps included	24 cartons
	<b>DOOR-SET PACKING</b> <b>SRXA78A_SNXXF</b> COLOUR OF THE COVER	1 carton contains: 1 cover for right system · 1 cover for left system · cover caps included	180 cartons

CARRIER	PART NUMBER	CARTON	PALLET
	<b>FRAUINXXXX5</b>	<p>1 carton contains:</p> <p>18 carriers</p> <p>•</p> <p>Screws to fix the plate to the carrier included</p>	24 cartons

COVER FOR THE CARRIER	PART NUMBER	CARTON	PALLET
	<p><b>SRUA78A SNXXI</b></p> <p>COLOUR OF THE COVER</p> 	<p>1 carton contains:</p> <p>18 covers for the carrier</p>	24 cartons

## Wind - Charts







Charts to determine which system is to be used for a particular door size and weight, for use with a pair of Wind systems.

For doors of large weight and dimensions, it is possible to use more than two systems on the same door.





These systems can be fixed to intermediate sides or, if not possible, by using the optional carrier for the plate (page 8).

In this case please carefully check the chart concerning the door overlay on top of the cabinet (D1).

We recommend that all applications are verified by a practical trial. Our technical Assistance Service is at your disposal to recommend the best solution.

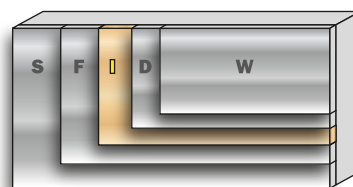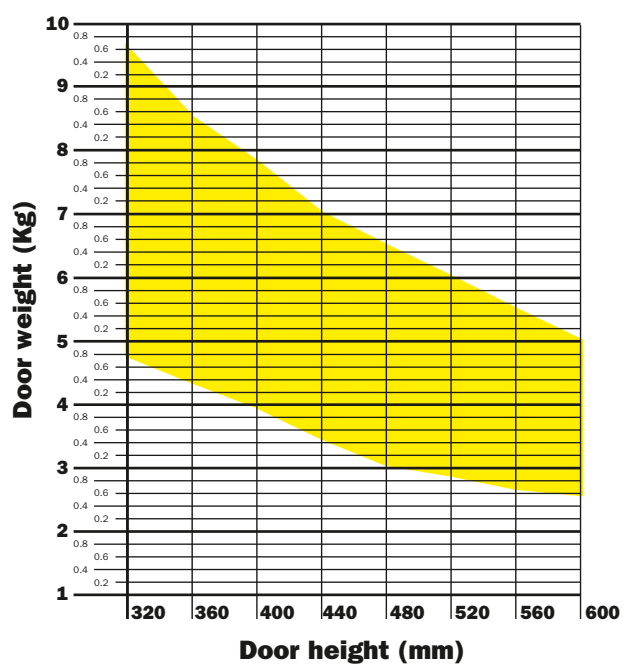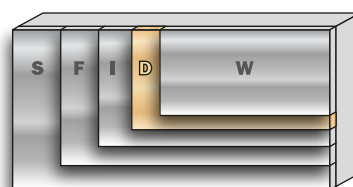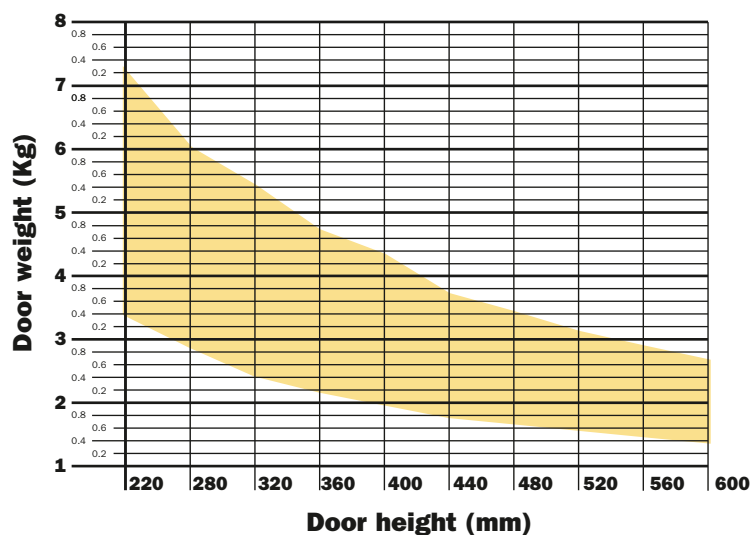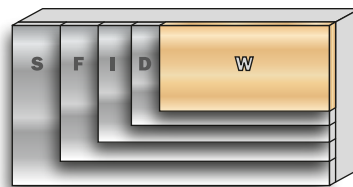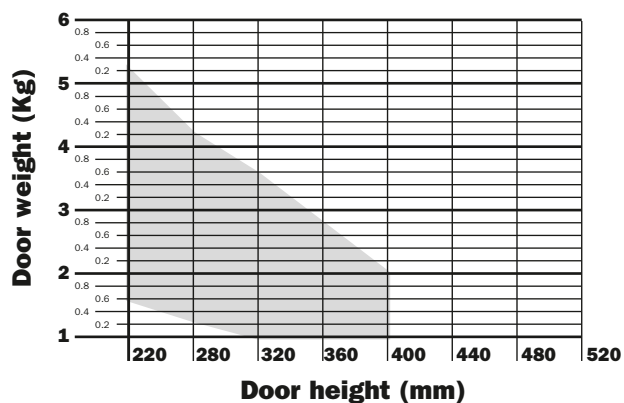



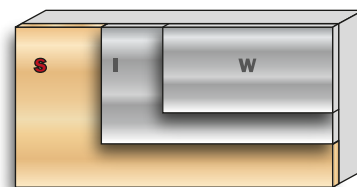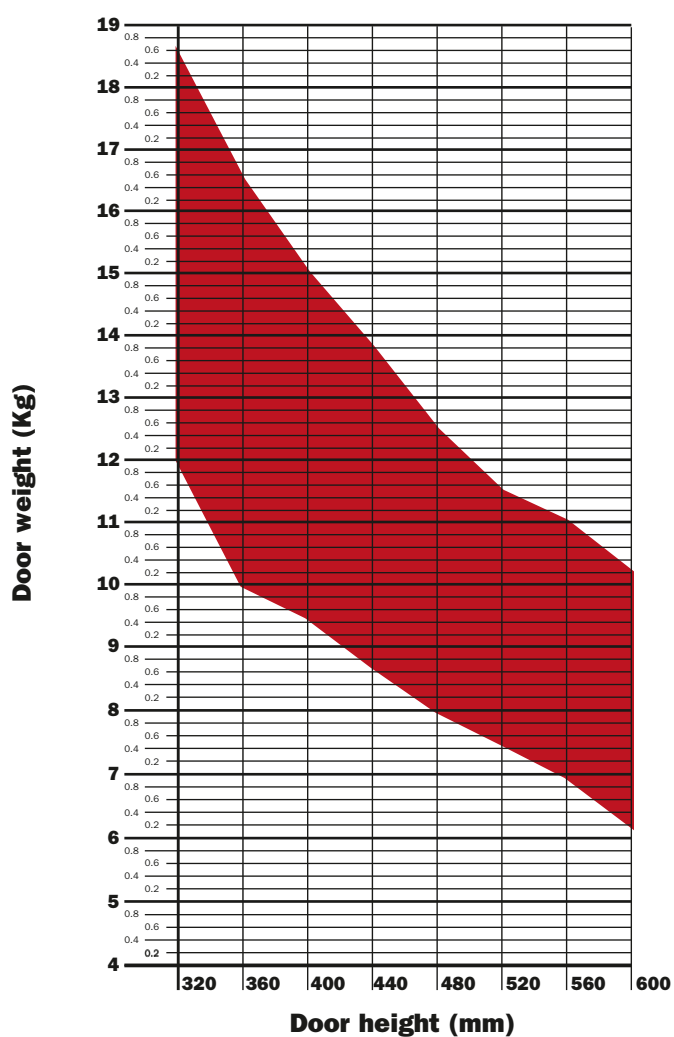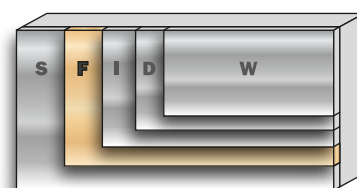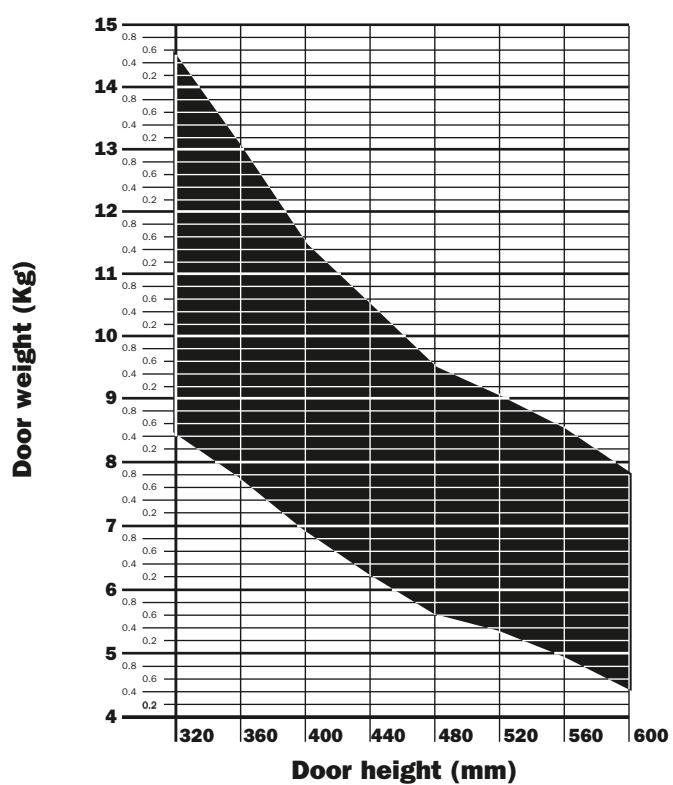



## Magnetic Push



## Magnetic Push - Recessed magnetic release device and retaining catches

**DPMSNB** - beige



**DPMSNG** - grey



Magnetic catch  
ø 10 mm, 40 mm length.

**Packing**

Boxes 250 pcs.  
Cartons 1.500 pcs.

**DPASNB** - beige



**DPASNG** - grey



Optional supplementary magnetic catch to increase the holding strength.  
It must always be used together with the DPM.  
The suggested position of the DPM is the point of pressure on the door. The DPA can be positioned at any point along the opening edge of the door.  
ø 10 mm, 40 mm length.

**Packing**

Boxes 250 pcs.  
Cartons 1.500 pcs.

**DP39XXG**



Adjustable magnetic retaining catch.  
ø16.6 mm

**Packing**

Boxes 250 pcs.

**DP28SN9**



Pin-fix striker for magnetic catches.  
ø 11.5 mm.

**Packing**

Boxes 250 pcs.

**DP38XX91**




Self-adhesive striker for magnetic catches.  
20x14 mm.

**Packing**

Boxes 250 pcs.

### Application of the standard magnetic catch.

Drill a hole  $\varnothing$  10 mm and min. 40 mm depth in the top, the side or the base panel of the cabinet.  
Insert the release device into the hole.


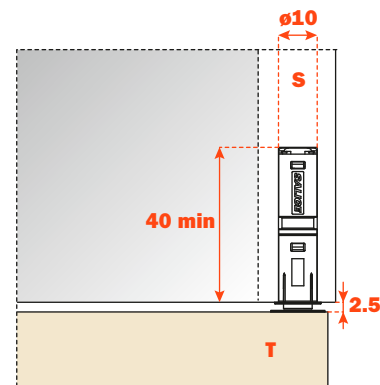


### Inserted adjustable magnetic catch.

The retaining catch DP39 is itself magnetic and together with the magnetism of the release device DPM considerably increase (30%) the holding strength of the door against the cabinet side, thus avoiding accidental openings.


For the installation it is necessary to drill a hole  $\varnothing$ 15 mm and 11 mm depth in the door.

Depth adjustment from -0.5 mm to +2.5 mm.

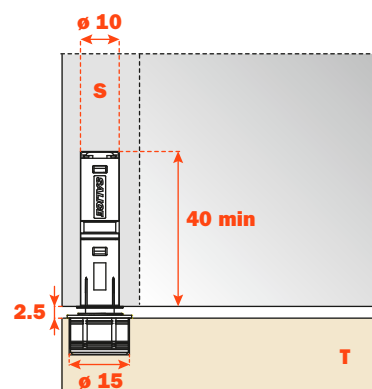

### Pin-fix striker.

Apply the retaining catch to the magnetic release device.  
Close the door.  
The point of the retaining catch will show where to insert it.  
Reopen the door and drive in the pin to fix in position.

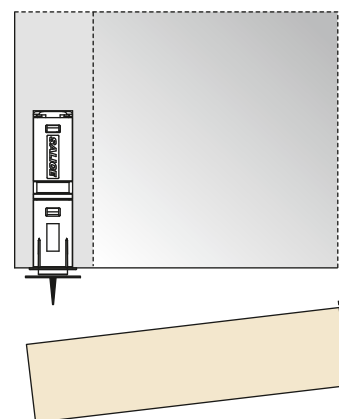

### Self-adhesive striker.


Apply the retaining catch to the magnetic release device. Remove the protective strip from the adhesive. Close the door. In this way the retaining catch is positioned on the door. Reopen the door and apply a firm pressure to the retaining catch to ensure a correct installation.

#### ATTENTION:


For a correct application and to ensure optimal endurance, we suggest these guidelines are followed:

- 1 - clean and degrease the door surface where the retaining catch is to be installed;
- 2 - remove the protective strip from the adhesive;
- 3 - place the retaining catch in position, in a place that is at room temperature  $\geq 10^\circ$  and apply a firm pressure for 10-15 seconds.


After few seconds from the installation the retaining catch is suitable for the use.  
After 24h the max. hold is attained.

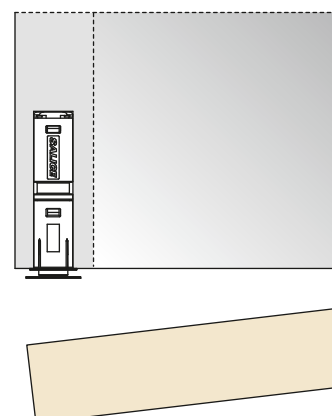

For cabinets over 400 mm high,  
it is suggested that one release device is used.

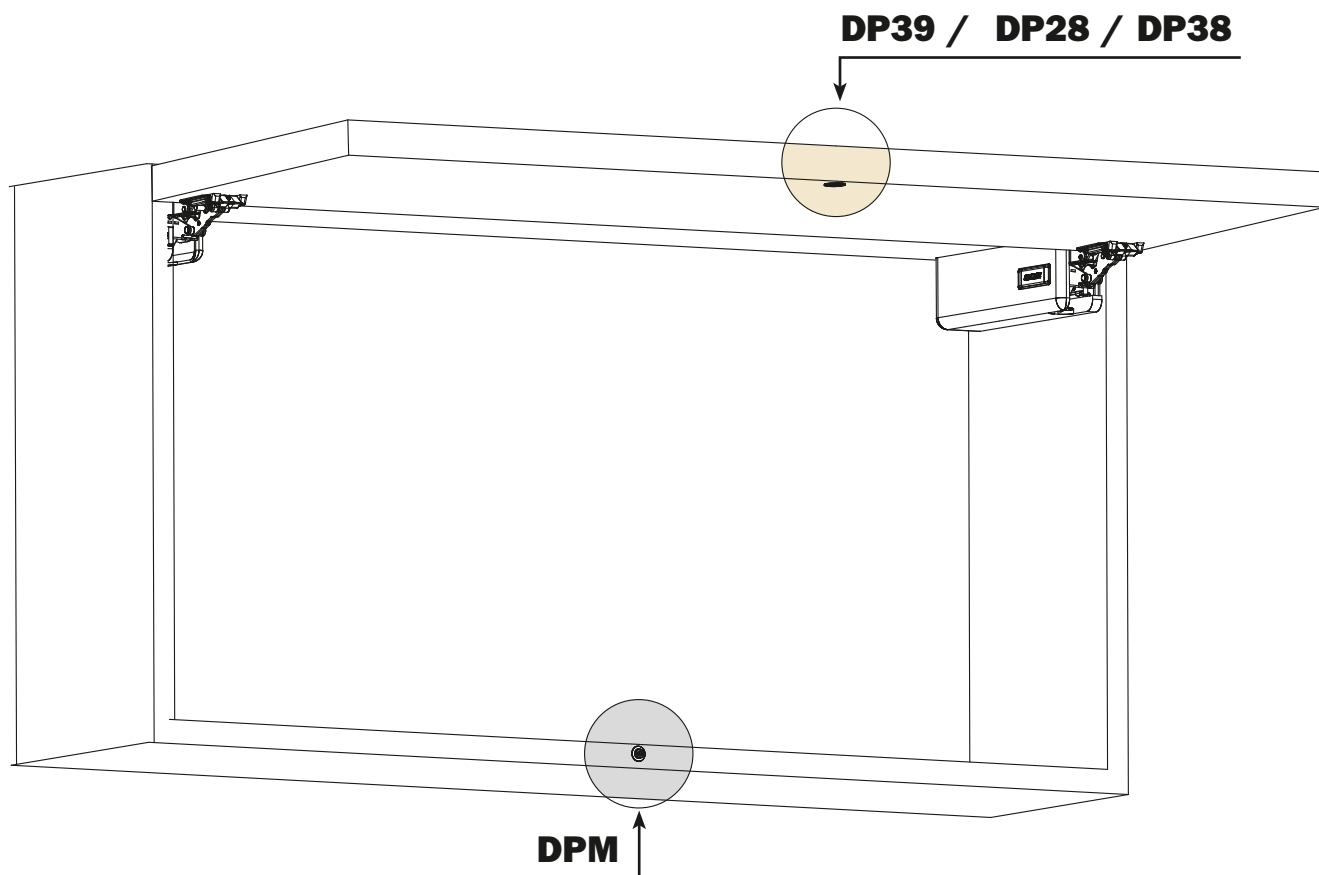

For cabinets less than 400 mm high,  
it is suggested that two release devices are used.

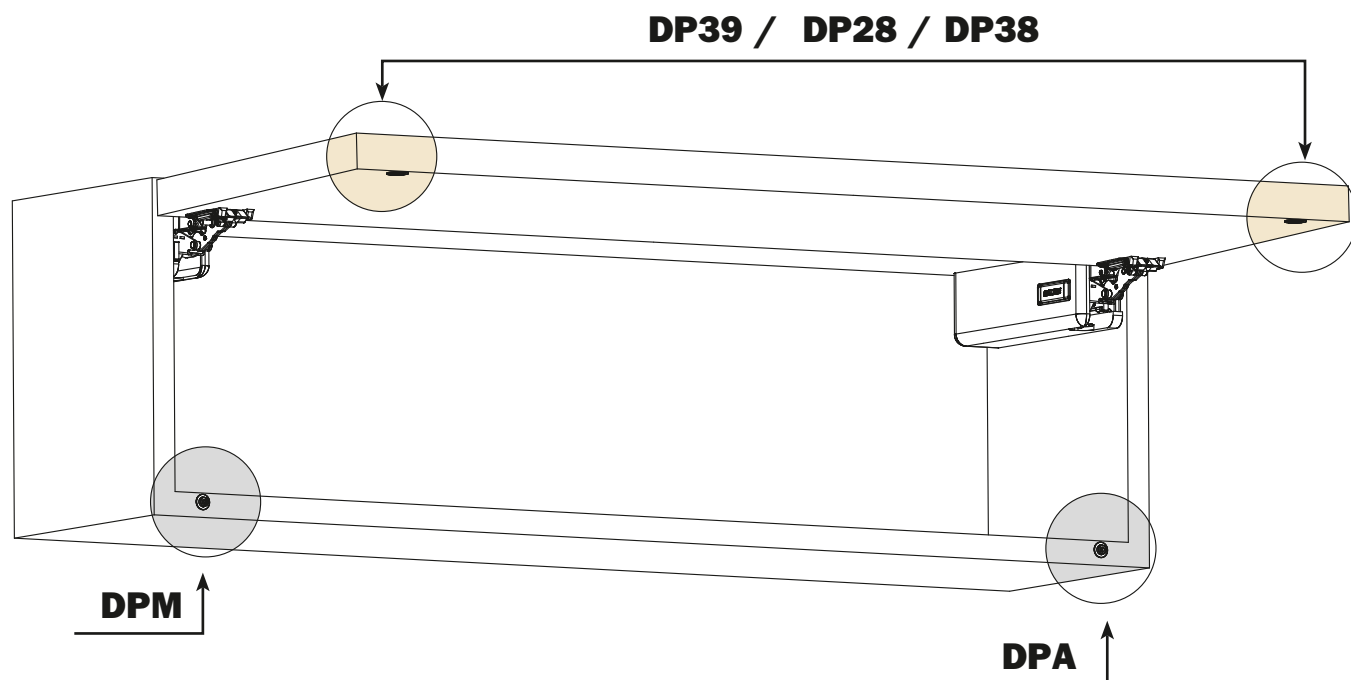



## **ARTURO SALICE S.p.A.**

VIA PROVINCIALE NOVEDRATESE, 10  
22060 NOVEDRATE (COMO) ITALIA  
TEL. 031 790424  
FAX 031 791508  
info.salice@salice.com  
www.salice.com

### **DEUTSCHE SALICE GMBH**

RUDOLF DIESEL STR. 10  
POSTFACH 1154  
74382 NECKARWESTHEIM  
TEL. 07233 9807-0  
FAX. 07233 9807-16  
info.salice@deutschesalice.de  
www.deutschesalice.de

### **DEUTSCHE SALICE GMBH**

VERKAUFSBÜRO NORD  
RINGSTRASSE 36/A30 CENTER  
32584 LÖHNE  
TEL. 05731 15608-0  
FAX. 05731 15608-10  
vknord@deutschesalice.de  
www.deutschesalice.de

### **SALICE FRANCE S.A.R.L.**

ROUTE DE GOA ZAC LES 3 MOULINS  
06600 ANTIBES  
TEL. 0493 330069  
FAX. 0493 330141  
info.salice@salicefrance.com  
www.salicefrance.com

### **SALICE ESPAÑA, S.L.U.**

CALLE COPÉRNICO, 11  
POLÍGONO INDUSTRIAL  
COLL DE LA MANYA  
08403 GRANOLLERS (BARCELONA)  
TEL. 938 45 88 61  
FAX 938 49 11 97  
info.salice@saliceespana.es  
www.saliceespana.es

### **SALICE UK LTD.**

KINGFISHER WAY  
HINCHINGBROOKE BUSINESS PARK  
HUNTINGDON CAMBS PE 29 6FN  
TEL. 01480 413831  
FAX. 01480 451489  
info.salice@saliceuk.co.uk  
www.saliceuk.co.uk

### **SALICE AMERICA INC.**

2123 CROWN CENTRE DRIVE  
CHARLOTTE NC. 28227  
TEL. 704 8417810  
FAX. 704 8417808  
info.salice@saliceamerica.com  
www.saliceamerica.com

### **SALICE CANADA INC.**

4025 SLADEVIEW CRESCENT  
UNIT # 7-9  
MISSISSAUGA, ONTARIO L5L 5Y1  
TEL. 905 8208787  
FAX. 905 8207226  
info.salice@salicecanada.com  
www.salicecanada.com

### **SALICE CHINA**

#### **(SHANGHAI) CO. LTD.**

1st FLOOR, B1 BLDG 928 MINGZHU ROAD  
XUJING, QINGPU DISTRICT  
SHANGHAI 201702 - CHINA  
Tel. 021 3988 9880  
Fax 021 3988 9882  
info.salice@salicechina.com  
www.salicechina.com